


RE-260 (3 POLE)



Part No. 457RE-260 (WITH BRACKET)
 Part No. 719RE-260 (WITHOUT BRACKET)
 Part No. 724 MOTOR BRACKET (90° ONLY)

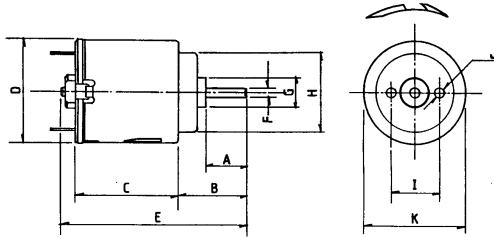

Weight 29g (approx)

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K
Millimeter	8.2	11.3	23.5	23.7	42.0	2.0	6.1	19.1	11.5	2.3	23.7
Decimal Inches	0.32	0.44	0.93	0.93	1.65	0.079	0.24	0.75	0.45	0.09	0.93

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL TORQUE		
	OPERATING RANGE	NOMINAL	SPEED R.P.M.	CURRENT A	SPEED R.P.M.	CURRENT A	TORQUE oz-in	TORQUE g-cm	OUTPUT W	EFF %	oz-in	g-cm
RE-260	3 - 6	3v Constant	4242	0.042	3296	0.151		6.8	0.345	33.91		30.61
RE-260	3 - 6	4.5v Constant	6722	0.065	5256	0.227		9.9	0.53	50.4		45.9
RE-260	3 - 6	6v Constant	8478	0.087	6587	0.302		13.6	0.92	31.5		61.84

Stall Current RE-260 at 3v = 0.58A, At 4.5v = 0.84A, at 6v = 1.10A